

**MEMPHIS AND  
SHELBY COUNTY**  **DIVISION OF PLANNING  
AND DEVELOPMENT**

City Hall – 125 N. Main Street, Suite 468 – Memphis, Tennessee 38103 – (901) 636-6619

**MEMPHIS LANDMARKS COMMISSION  
CERTIFICATE OF APPROPRIATENESS**

---

TO: Applicant  
Windows USA

ISSUE DATE: May 8, 2023  
DOCKET: COA 2023-057  
517 Peabody Square  
Central Gardens HD

***Sent via electronic mail to:*** [permits@windowsusa.com](mailto:permits@windowsusa.com)

---

On May 4, 2023, the Memphis Landmarks Commission ***approved*** your application as a ***MINOR COA*** for pocket replacement windows, subject to the following conditions:

1. Any change or deviation from the approved Certificate of Appropriateness (COA) shall be submitted to the Memphis Landmarks Commission for review and approval.

---

Be advised, this COA expires in one (1) year if a permit has not been issued by the Office of Construction Code Enforcement.

---

Respectfully,



Seth Thomas  
Planner III  
Land Use and Development Services  
Division of Planning and Development

Encl: Approved plan(s)


Approved Window



# ALASKAN™ WINDOW SYSTEMS

DOUBLE HUNG | HORIZONTAL SLIDER | FIXED PICTURE | SPECIALTY SHAPES

The Alaskan™ combines the highest quality and technology with the largest selection of premium options at competitive prices for a window that lasts a lifetime.

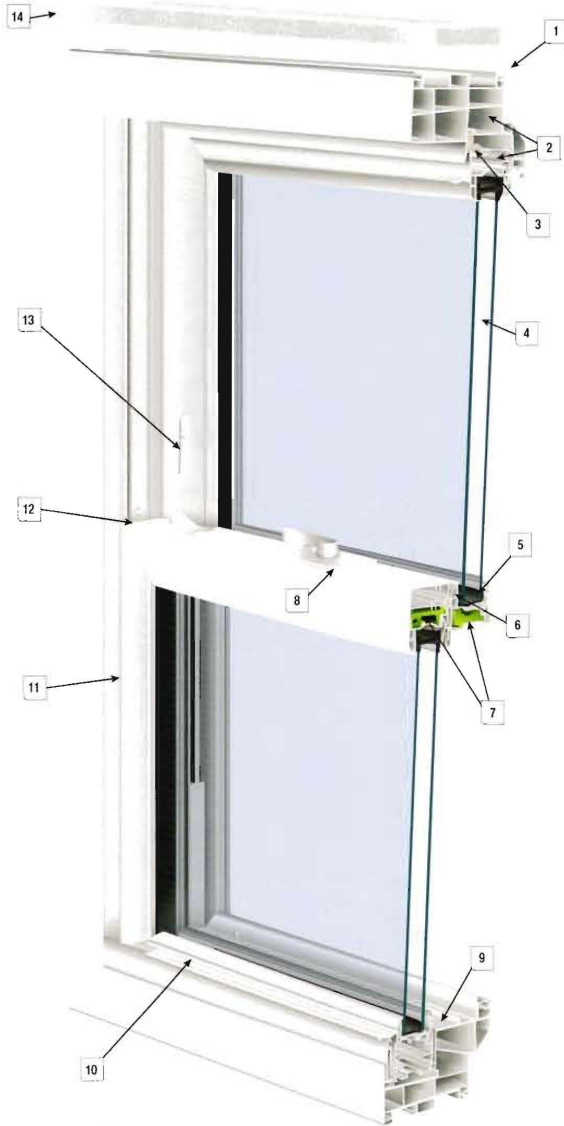

## FEATURES

- 1 Beveled Exterior Main-Frame
- 2 Multi-Chambered Sashes and Main-Frame
- 3 Multi-Point Double Barrier-Fin Weather Stripping System Along Sashes and Main-Frame
- 4 7/8" Insulated Double Strength Glass Unit
- 5 Tru-Seal Duralite® Warm Edge Flexible Spacer System
- 6 Fully Extruded Interlock at Sash Locking Rail
- 7 Reinforced Innergy™ Rigid Thermal Interlock System Standard
- 8 Routed Flush Mount Dual Cam Locks
- 9 Pocket Sill Design
- 10 Fully Extruded Decorative Lift Rail
- 11 Equal-Lite Cove Molded Sashes
- 12 E-Z Tilt™ Sash Design with Routed Flush Mount Dual Tilt Latches
- 13 Twin Vent Stops
- 14 Insulated Foam Wrap

## STANDARD

- Sunshield® Virgin Vinyl with Titanium Alloy Compound
- Main-Frame Jamb Depth Dimension of 3 1/4"
- Full Screens
- Patented Fusion Welded Frame and Sashes
- Constant Force Balance System
- Head and Sill Expanders

### CONSTANT FORCE BALANCE SYSTEM



### NFRC TEST RATINGS

MODEL	U-FACTOR	SHGC
PICTURE	.27	.22
DOUBLE SLIDER	.28	.21
DOUBLE HUNG	.28	.21

\*\*Ratings supplied with DS CS 28/Duralite®/Argon/Gelids

Available Colors



Arctic White



Desert Sand



ALASKAN™ REPLACEMENT DOUBLE HUNG

